



EQUIPMENT

S-5000™ & S-6000™ MK-2 SAND FILTERS

COMMERCIAL/DOMESTIC

*Designed for domestic & commercial
installation with industrial strength
polymer for strength & durability*

WHEN PERFORMANCE COUNTS



Sand Filters

Industrial strength polymer sand filters

Thousands of commercial and domestic installations over the last two decades bear testament to the quality and reliability of the Poolrite filter.


Features of the S-6000 and S-5000 MK2 Filters

- One piece seamless rotationally moulded tank designed for maximum strength
- Made from high density polyethylene for strength & durability
- Poolrite's overdrain is designed for smooth, even flow of water into the filter tank
- Poolrite's underdrain ensures maximum backwashing power for longer filter cycles
- All non-corrosive construction suitable for all types of sanitation
- Australian design & manufacture

SMARTVALVE™ – exclusive to S-6000/S-5000 MK2 Filters

- Gives an audible signal when backwashing is required
- Pressure adjustable to suit all plumbing configurations
- 50mm ports for larger water flow
- Large diameter valve for more water flow and quieter operation
- Weather cover to prevent debris buildup around valve stem thus ensuring easy operation & longer life
- Easy to read, centrally located pressure gauge mounted under the weather cover for extra protection
- Gasket mounted to selector plate – no "spider" gasket required
- Large ergonomically designed handle for easy operation
- Fitted with 50mm pump unions allowing quick connection and simplified servicing
- Battery test switch

S-6000 MK2

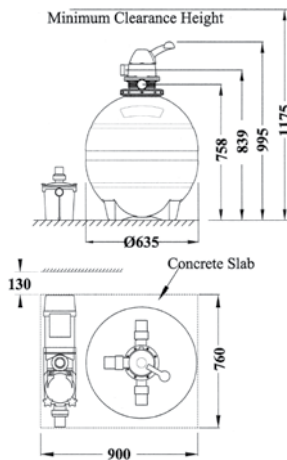


S-6000 specification chart

| | |
|--------------------------|-----------|
| Max Flow Rate LPH | 18,000 |
| Sand weight kg (lbs) | 120 (264) |
| Sand grade mm | -1.2+0.6 |
| Coarse media kg (lbs) | 40 (88) |
| Filter tank dia. mm (in) | 635 (25) |

| Poolrite pump model | (Hp) | Input | Output |
|---------------------|------|-------|--------|
| SQI 400 | 0.75 | 1200w | 750w |
| SQI 500 | 1.25 | 1300w | 930w |
| DP 300 | 1.00 | 1200w | 750w |
| DP 375 | 1.25 | 1300w | 930w |

S-5000 MK2

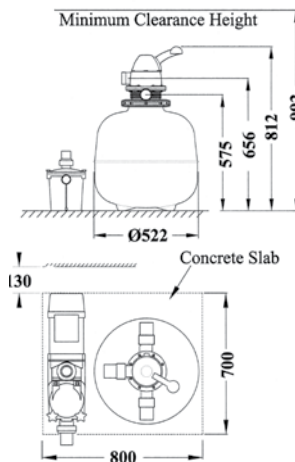

S-5000 specification chart

| | |
|--------------------------|----------|
| Max Flow Rate LPH | 13,200 |
| Sand weight kg (lbs) | 80 (176) |
| Sand grade mm | -1.2+0.6 |
| Coarse Media kg (lbs) | 10 (22) |
| Filter tank dia. mm (in) | 510 (20) |

| Poolrite pump model | (Hp) | Input | Output |
|---------------------|------|-------|--------|
| SQI 400 | 0.75 | 1200w | 750w |
| DP 300 | 1.00 | 1200w | 750w |

WARRANTY:

- 10 year filter tank warranty
- All other components carry a 12 month warranty.



EQUIPMENT

AUSTRALIA

HEAD OFFICE – QLD: 415 Creek Road MT GRAVATT 4122
Telephone: (07) 3323 6555, Fax: (07) 3323 6500

Nth QLD: 36 Hugh Ryan Drive GARBUTT 4814
Telephone: (07) 4779 4880, Fax: (07) 4779 6714

Manufactured by Poolrite Equipment Pty Ltd ABN 11 001 674 004 Website: www.poolrite.com.au Email: info@poolrite.com.au

For good clean fun!

NSW: 6 Forsyth Close WETHERILL PARK 2164
Telephone: (02) 9729 0166, Fax: (02) 9729 2759

VIC: 1 Endeavour Way BRAESIDE 3195
Telephone: (03) 9588 1770, Fax: (03) 9558 1779

WA: 16 Ledger Road BALCATTA 6021
Telephone: (08) 9344 3871, Fax: (08) 9345 3923

NEW ZEALAND
22/761 Great South Road, Penrose AUCKLAND
Telephone (09) 571 0210, Fax: 0800 766 574